






Where reliability is key

The L-Series from CompAir

Well known in the industry for quality and reliability CompAir continuously develops the L-Series achieving cutting edge performance and efficiency. The new high capacity range L160 to L290 of lubricated screw compressors comprises of fixed speed and regulated speed (RS) models. The design focus of these compressors is purely on performance and efficiency. Apart from the premium efficiency airend, several features, such as fixed and regulated speed radial fans, have been added to further enhance efficiency and reduce running costs.









Engineering excellence

Conn

Compressors are more than just a financial investment, they are a key component in ensuring that manufacturers, processors and operators receive consistent, high quality, low cost air. The screw compression element is the heart of the compressor and therefore CompAir keeps the design and manufacture in-house, using the latest CNC rotor grinding machinery, coupled with online laser technology. The resulting reliability and performance ensure that operating costs will remain low throughout the compressors life.

CompAir





Premium efficiency airend

The high-output compression element with slow rotational speed reduces energy costs. In addition, the innovative design of the fail safe shaft seal, integrated oil filter and oil regulation valve, ensures external hoses are reduced to a minimum to guarantee highest levels of quality and reliability are achieved. Under the free Assure warranty the airends are covered up to 44,000 hours or 10 years*.





Engineered to perform

Large surface after coolers

Optimum cooling of the air and oil circuit is achieved by drawing the coolest possible air onto the coolers from the outside. The coolers are offset and cooled independently by separate radial fans and exhaust chambers which ensures optimum oil temperature and lowest achievable air discharge temperature. This results in longer component life and lower downstream air treatment running costs.

High performance separator filter

Two-stage filtration ensures highest quality air is delivered to your air treatment resulting in lower pressure drops and reduced overall system running costs.

High efficiency electric motor

Premium efficiency IE3 motor fitted as standard. Optionally available with IE4 motor.

Thermostatically controlled radial fans

High efficiency, high thrust, very low noise fans fitted on both air and oil coolers.



Automatic motor lubrication

Correct charge of lubricant to the bearings at all times delivers unrivalled reliability and reduced motor life costs.



Viton vitaulic couplings

High quality solid hose and pipe connections ensure leak free connections keeping your compressor clean and service friendly.

Zero loss autodrain

Fitted to the air aftercooler to remove bulk water allowing greater flexibility of installation options.





CompAir lubricated rotary screw

compressors incorporate the very

latest technological advances and

guarantee a continuous supply of

Get in touch

Delcos XL innovative touch screen compressor controller

The Delcos XL with its high resolution touch screen display is extremely user-friendly and self-explanatory. All functions are clearly structured in five main menus and are intuitively visual. The multilingual Delcos XL control system ensures reliable operation and protects your investment by continuously monitoring the operational parameters, which is essential for reducing your running costs.

Features & functions

- Home Page instant overview of the compressor status
- Real Time Clock allows pre-setting of compressor starting/stopping
- Second Pressure Setting
- · Integrated Cooling and Dryer Control
- Fault History Log for in-depth analysis
- · Remote Control via Programmable Inputs
- Auto Restart after Power Failure
- · Optional Base Load Sequencing
- SD Card stores several run characteristics
- · iConn enabled

Trend diagrams

With the ability to display detailed system analysis in the form of trend diagrams and graphs, operating parameters can be precisely set to maximise efficiency.

- Line / Network Pressure
- Motor Speed (Regulated Speed)
- On Load Hours / Total Hours Run & Average Volume Flow
- · Weekly Average Volume Flow

iConn Industry 4.0 solution

high quality compressed air.


The L-Series is equipped with iConn as a standard. iConn is the smart, proactive real-time monitoring service that delivers in-depth and real-time knowledge on the system to our compressed air users. It enables accurate production planning and total peace-of-mind protection, generating insight and statistics that keep users informed on performance, at the same time highlighting potential issues before they become a problem.

· Condition based monitoring

GG


- · Predictive maintenance required
- · Full air manufacturing control optimisation
- · External data pattern integration














Regulated Speed Compressors

The perfect response to individual air demands

Regulated speed compressors from CompAir can efficiently and reliably handle the varying air demand found in most plant air systems.

The annual cost of ownership can be significantly reduced using regulated speed technology.

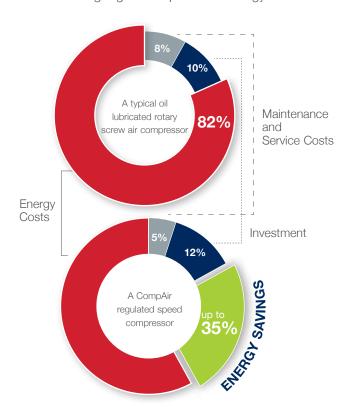

Tried and tested inverter concept

- · Integrated in the electric cabinet
- Protected from dust by replaceable inlet filters
- Maximum reliability from optimised cooling system
- · Ensures high availability and long-life

Regulated speed radial fan

This range can be optionally equipped with inverter driven radial fan on the oil after cooler.

- · Optimises oil temperature regulation
- Saves energy costs

CompAir RS features are your benefits

The L-RS Series products are designed to obtain the greatest efficiency across the entire operating range.

Wide regulation range

No cycles means substantial energy savings

Perfect motor - drive - airend design

High efficiency across broad flow range



accounts for typically 80% of the total costs.

Compressed air systems typically comprise of multiple compressors delivering air to a common distribution system. The combined capacity of those machines is generally greater than the maximum site demand.

With CompAir's advanced demand responsive sequencer SmartAir Master, the efficiency of the compressor stations with up to twelve compressors including downstream equipment can be maximised. Apart from the energy savings, the compressed air management system also contributes to decreased downtime, optimum performance and monitoring, and ultimately leads to increased plant productivity.

A profitable investment

www.compair.com

 Harmonises the workload of up to 12 fixed or regulated speed compressors


compressor management system

- Eliminates energy waste by tightening the network pressure to the narrowest pressure band
- · Equalises the running hours for economic servicing and increased uptime

Characteristics of each compressor



Diagram display





How to add further value

Heat recovery

The heat generated during compression is paid for as part of the process, then paid for again during removal by way of cooling fans. Instead of simply removing the heat, it can be used to generate free hot process water or hot water heating systems by utilising a high efficiency, factory fitted oil to water heat exchanger.

Upgrade your compressed air system with heat recovery


- · Significant cost savings
- · Lower CO, emissions
- · Low investment costs

Inverter driven radial fan

The ability to vary the speed of the fan via a frequency inverter optimises the efficiency. All regulated speed compressors are equipped with inverter driven radial fans on the oil cooler as standard. Fixed speed compressors can have it factory fitted as an option.

Base load sequencing

Compressed air systems typically comprise of multiple compressors delivering air to a common distribution system. The addition of the optional base load sequencing module will allow to control centrally up to four compressors matching the delivery to the plant demand.

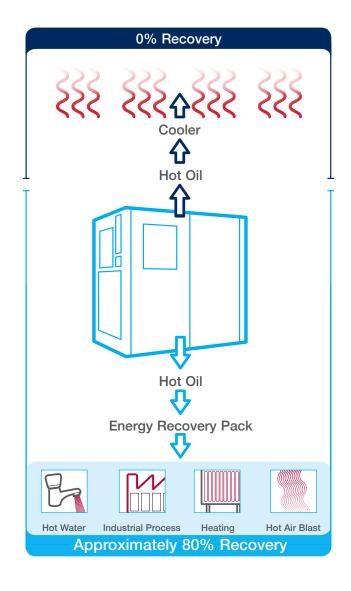




Compressed air purification

A modern production system and process demands increasing levels of air quality. A CompAir compressed air system utilising the latest technology provides an energy efficient solution at lowest life cycle costs.



Water Cyclone Separator X Series

Designed for efficient removal of bulk liquid contamination from compressed air.





Bekomat Condensate Drain and Oil-Water-Separation Systems

To drain compressed air condensate without loss of compressed air and separate any filtered oil to meet all the requirements of the Water Ecology Act and of other relevant provisions.



Compressed Air Refrigerant Dryer

CompAir offer a full range of energy efficient and environmentally friendly stand alone refrigerant dryers.

Heatless Desiccant DryersSeries A_XS and A_TX.

Heat Regenerative
Desiccant Dryers
Series A_TV and A_RS.




Nitrogen Generator

On-site industrial nitrogen gas generation using the factory compressed air. Designed to achieve maximum efficiency and gas quality.



The best investment protection you can get

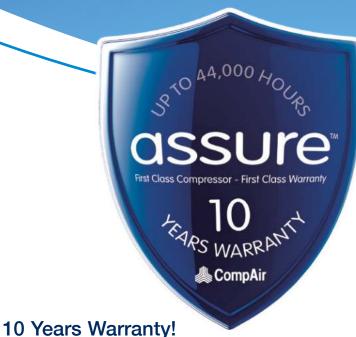

The CompAir Assure Warranty and Service programmes will assure you up to 44,000 hours/10 years ¹⁾. It is one of the most generous warranties available in the industry affording you total peace of mind.

Your benefits:

- The Assure warranty is totally free to the compressor owner ²⁾
- The CompAir authorised service provider will deliver a guaranteed quality of service
- An Assure service agreement underpinning the warranty will enable accurate maintenance, budgeting and cost of ownership
- The use of genuine CompAir parts and lubricants will maximise compressor life and efficiency



Compact design - easy installation

The small footprint reduces the space required for installation.

Easy servicing

The design of these packages ensures that the service points are readily accessible. The enclosure side doors are hinged and removable to allow complete access to all service points. The reduced number of moving parts further lowers the maintenance costs.

CompAir genuine spare parts

Enjoy complete peace of mind.

Genuine CompAir parts and lubricants ensure that compressed air plant reliability and efficiency is maintained at the highest standards. CompAir spare parts and lubricants are distinguished by:

- Long service life, even under harshest conditions
- · Minimum losses contributing to energy savings
- · High reliability improves plant up-time
- Products manufactured with the strictest Quality Assurance Systems



Warranty duration is limited to 6 years/44,000 hours on the whole package, 10 years/44,000 hours on the air end. Whichever is the soonest.

²⁾ subject to Terms & Conditions



CompAir L-Series - Technical Data

L160 - L290 Fixed Speed

Compressor Model	Nominal Pressure	Drive Motor	FAD 1]	Noise Level ^{2]}	Weight	Dimensions L x W x H
	[bar g]	[kW]	[m³/min]	[dB(A)]	[kg]	[mm]
L160	7.5	160	32.04	76	4186	2907 x 2071 x 2193
	10	160	28.20	76	4186	2907 x 2071 x 2193
	13	160	23.91	76	4186	2907 x 2071 x 2193
L200	7.5	200	39.23	77	4415	2907 x 2071 x 2193
	10	200	34.85	77	4415	2907 x 2071 x 2193
	13	200	29.38	77	Level 21 [dB(A)] [kg] 76 4186 76 4186 76 4186 77 4415 77 4415	2907 x 2071 x 2190
L250	7.5	250	42.03	78	4625	2907 x 2071 x 2193
	10	250	37.01	78	4625	2907 x 2071 x 2190
	13	250	32.64	78	4625	2907 x 2071 x 2193
L290	7.5	250	47.10	79	4650	2907 x 2071 x 2193
	10	250	41.53	79	4650	2907 x 2071 x 219
	13	250	36.44	79	4650	2907 x 2071 x 219

L160RS – L290RS Regulated Speed

Compressor Model	Nominal Pressure [bar g]	Drive Motor [kW]	FAD ^{1]} [m³/min]	Noise Level at 70% Load ^{2]} [dB(A)]	Weight [kg]	Dimensions L x W x H [mm]
L160RS	5 - 13	160	6.54 - 32.33	75	4378	2907 x 2071 x 2193
L200RS	5 - 13	200	5.99 - 39.44	77	4573	2907 x 2071 x 2193
L250RS	5 - 13	250	5.83 - 42.80	78	4669	2907 x 2071 x 2193
L290RS	5 - 13	250	5.87 - 47.02	79	4684	2907 x 2071 x 2193

All Models are also available as **WATER COOLED** versions. For technical specifications please refer to the water cooled technical information sheets.





^{1]} Data measured and stated in accordance with ISO 1217, Edition 4, Annex C and Annex E and the following conditions: Air Intake Pressure 1 bar a, Air Intake Temperature 20°C, Humidity 0 % (Dry).

 $^{^{\}rm 2]}$ Measured in free field conditions in accordance with ISO 2151, tolerance \pm 3dB (A).




Global experience truly local service

With over 200 years of engineering excellence, the CompAir brand offers an extensive range of highly reliable, energy efficient compressors and accessories to suit all applications.

An extensive network of dedicated CompAir sales companies and premium partners across all continents provide global expertise with a truly local service, ensuring our advanced technology is backed up with the

ensuring our advanced technology is backed up with the right support.



CompAir compressed air product range

Advanced Compressor Technology Lubricated

- Rotary Screw
 - > Fixed and Regulated Speed
- Portable

Oil-Free

- · Water Injected Screw
 - > Fixed and Regulated Speed
- Two Stage Screw
 - > Fixed and Regulated Speed
- Rotary Scroll
- Ultima®

Complete Air Treatment Range

- Filter
- · Refrigerant and Desiccant Dryer
- · Condensate Management
- Heat of Compression Dryer
- Nitrogen Generator

Modern Control Systems

- CompAir DELCOS Controllers
- · SmartAir Master Sequencer
- · iConn Smart Compressor Service

CompAir policy is one of continuous improvement and we therefore reserve the right to alter specifications and prices without prior notice. All products are sold subject to the Company's conditions of sale.

Value Added Services

- Professional Air Audit
- · Performance Reporting
- Leak Detection

Leading Customer Support

Custom Engineered Solutions

PureAir

ULTIMA UTAC

- · Local Service Centres
- Genuine CompAir Parts and Lubricants





Premium compressor design and industry leading warranty L160^eRS - L290^eRS

Fixed & Regulated Speed



State-of-the-art new technology



Well known in the industry for quality and reliability, CompAir continuously develops the L-Series to achieve cutting edge performance and efficiency. The new high power range L160° to L290° of lubricated screw compressors comprises of fixed speed and regulated speed (RS) models. The design features brand new, innovative technology engineered to provide next level performance and efficiency for customers across a wide variety of industries.



Pressure range

5 to 10 bar



Volume flow

9.4 - 47.8 m³/min



Motor power

160 to 250 kW



Engineering excellence

Compressors are more than just a financial investment, they are a key component in ensuring that manufacturers, processors and operators receive consistent, high quality low cost air.

The screw compression element is the heart of the compressor and therefore CompAir keeps the design and manufacture in-house, using the latest CNC rotor grinding machinery, coupled with online laser technology.

The resulting reliability and performance ensures that operating costs will remain low throughout the compressor's life.




FourCore technology - the power of 4!

ADVANCED COMPRESSION TECHNOLOGY

CompAir's centre of excellence at its Simmern production site in Germany, home to the CompAir ranges of compressors, has designed and engineered a brand new, patented technology that offers best-in-class energy efficiency.

Our application engineering team have developed a premium efficiency 2-stage model for fixed and regulated speed compressors using the new technology of the compact double stage airend. What's unique about this design is that the airend has 1 motor and 4 rotors located in a single, semi-integrated casting. This differs from traditional 2-stage compressors, providing a compact package with high energy savings. In fact, these machines are the same size as a 1 stage machine due to new airend technology.



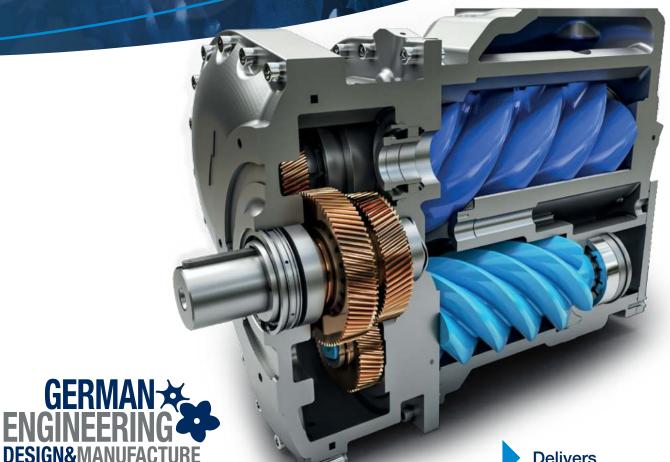

Premium efficiency airend

The new airend design features our highly efficient airend which delivers the highest quality compressed air at a low rotational speed to help minimise the unit's energy consumption and achieve excellent performance.

The semi integrated airend design with integrated oil filter and oil regulation valve means fewer external components and pipework, taking less physical space, eliminating the risk of leakage and offering simplified maintenance.

The innovative design of the fail safe shaft seal, ensures the highest levels of quality and reliability are achieved, minimising the down time of the compressor. Our top quality airends are covered by the new 10 year warranty and up to 44,000 hours.*

Delivers best-in-class efficiency

10 year, up to 44,000 hours warranty coverage



Best-in-class efficiency & energy savings

New generation FourCore airend technology

- Very compact & very low weight
- ✓ Highest efficiency
- Semi-Integration of the oil filter, oil stop valve, oil distribution system, and oil temperature valve:
 - less hoses and hydraulic pipes → less costs
 - no leakages
- ✓ High flexibility by a 2-step drive gear configuration → UNIQUE to CompAir
 - constant interstage pressure → better efficiency
 - compact design
- ✓ Designed to implement in current L-Range → UNIQUE to CompAir
- ✓ Fixed and variable speed versions possible
- 10 years warranty

Improved efficiency by 8-10% compared to a conventional single stage

CompAir's innovative new FourCore technology delivers greater efficiency in a low weight and compact size. The series comprises of best-in-class premium efficiency 2-stage oil lubricated compressors across the range of 160-250kW. In some cases, payback times can be less than a year, delivering a fantastic return on investment and incredible energy savings to the user.





- New CompAir FourCore Technology
 - Comparable Single Stage Technology



One of the smallest footprints in the market of 2 stage oil lubricated units

The core benefit of the new L160° to L290° range is that it delivers much greater efficiency than 1 stage compressors but comes in a German engineered package that is the same size as it! Users in a variety industries benefit from an amazing, space-saving design that offer next level efficiency and performance.

A profitable investment

- · Best-in-class compressed air efficiency
- Small fotprint and sustainable compact design
- Semi-integrated "FourCore" airend delivers the best possible performance
- Less connections and pipework, minimises possibility of leaks and enables simple servicing



2 stage compressors are not only expensive, they also take up valuable (and unnecessary) space due to their large footprint. Incorporating all of the benefits of the 2 stage compression in the same size package as a single stage unit, CompAir have developed in-house, a unique and optimised, ultra-efficient airend technology in FourCore.







Engineered to perform

Large surface after cooler

Optimum cooling of the air and oil circuit is achieved by drawing the coolest possible air into the coolers from the outside. The coolers are offset and cooled independently by separate radial fans and exhaust chambers which ensures optimum oil temperature and lowest achievable air discharge temperature. This results is longer component life and lower downstream air treatment running costs.

High performance separator filter

Two-stage filtration ensures the highest quality air is delivered to your air treatment, resulting in lower pressure drops and reduced overall system running costs.

High efficiency electric motor

Premium efficiency IE4 motor fitted as standard.

Delcos XL innovative touch screen compressor controller

The Delcos XL with its high resolution touch screen display is extremely user-friendly and self-explanatory. All functions are clearly structured in five main menus and are intuitively visual. The multilingual Delcos XL control system ensures reliable operation and protects your investment by continuously monitoring the operational parameters, which is essential for reducing your running costs.

Thermostatically controlled radial fans

High efficiency, high thrust, very low noise fans fitted on both air and oil coolers.

Automatic motor lubrication

Correct charge of lubricant to the bearings at all times delivers unrivalled reliability and reduced motor life costs.




Viton vitaulic couplings

High quality solid hose and pipe connections ensure leak free connections keeping your compressor clean and service friendly.

Zero loss autodrain

Fitted to the air aftercooler to remove bulk water allowing greater flexibility of installation options.

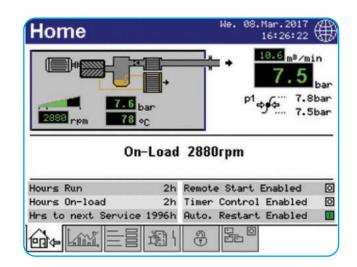



PureAir

...why you cannot ignore iConn!



The environmentally conscious solution

GG

Reduce energy waste

In today's climate, all businesses must ensure they are doing what they can to enhance their green credentials and actively ensure their production process is as environmentally friendly as possible. CompAir are committed to creating products that have less impact on the planet, providing greener solutions for our partners in all industries.

We create solutions that help our customers save energy –including products that are fuel-efficient, aid in heat recovery, and reduce waste wherever possible. The new L160 to L290 range delivers a major breakthrough in compressor technology and provides enhanced levels of efficiency to offer even more energy savings, reducing CO₂ waste.

Investing in energy saving machines shows corporate responsibility and a future-proofing mentality that will help your business to tackle the challenges that industrial businesses are likely to face in the future when it comes to the environment.

Save more energy by matching output with demand

A vast amount of the energy lost in a factory or plant is due to wastage in an air compressor installation. Regulated speed (RS) technology ensures that compressed air systems perform as efficiently as possible.

CompAir's RS compressors efficiently and reliably handle the varying air demand found in most air systems which can significantly reduce the annual cost of ownership. CompAir's L160e with FourCore technology can reduce the amount of CO₂ produced by aproximately 134 tonnes in just 1 year!*

55

Total potential CO₂ reduction of 1,500 tonnes in 10 years

FourCore Technology from CompAir offers a reduced environmental footprint, cutting tonnes of CO₂ during manufacture, use and disposal, increasing your "green" credentials and market appeal.

Reduced greenhouse gas emissions*

CompAir's L160e running 8,000 hours per year, compared to a conventional single stage 160kW compressor can reduce the amount of CO₂ produced by 134 tonnes – equivalent to 29 family cars or 337,700 miles driven by a passenger car in 1 year! That's the same as planting 165 acres of forest!

*https://www.epa.gov/energy/greenhouse-gas-equivalencies-calculator

Tried and tested inverter concept

- Integrated in the electric cabinet
- · Protected from dust by replaceable inlet filters
- · Maximum reliability from optimised cooling system
- · Ensures high availability and long-life

Regulated speed radial fan

This range can be optionally equipped with inverter driven radial fan on the oil after cooler.

- Optimises oil temperature regulation
- Saves energy costs



your benefits

The L-RS Series products are designed to obtain the greatest efficiency across the entire operating range.

Wide regulation range

No cycles means substantial energy savings.

Perfect motor - drive - airend design

High efficiency across broad flow range.

How to add further value









Hot Water

Heat recovery

The heat generated during compression is paid for as part of the process, then paid for again during removal by way of cooling fans. Instead of simply removing the heat, it can be used to generate free hot process water or hot water heating systems by utilising a high efficiency, factory fitted oil to water heat exchanger.

Upgrade your compressed air system with heat recovery

- · Significant cost savings
- · Lower CO, emissions
- · Low investment costs

Compressed air purification

A modern production system and process demands increasing levels of air quality, and compressed air operators need to ensure that the downstream equipment also delivers on it 100%.

The new downstream portfolio manufactured by CompAir utilising the latest technology, provides an energy efficient solution at lowest life cycle costs. The same quality, performance and efficiency standards delivered by the compressors can now be enjoyed from the air treatment range.

Investment in a manufacturing site in addition to the support teams, ensures that compressed air operators don't need to worry about the quality of their compressed air - quality that is key to ensuring maximum production efficiency and investment protection.

- · Water Cyclone Separators
- Compressed Air Filters
- · Condensate Drain System
- · Compressed Air Refrigerant Dryer
- · Heatless Desiccant Dryers
- · Heat Regenerative Desiccant Dryers
- Nitrogen Generator
- · SmartAir Master Multi Compressor Controllers



The best investment protection you can get



10 Years Warranty!

The CompAir Assure Warranty and Service programmes will assure you up to 44,000 hours/10 years ¹⁾. It is one of the most generous warranties available in the industry affording you total peace of mind.

Your benefits:

- The Assure warranty is totally free to the compressor owner ²⁾
- The CompAir authorised service provider will deliver a guaranteed quality of service
- An Assure service agreement underpinning the warranty will enable accurate maintenance, budgeting and cost of ownership
- The use of genuine CompAir parts and lubricants will maximise compressor life and efficiency
- Warranty duration is limited to 6 years/44,000 hours on the whole package, 10 years/44,000 hours on the air end. Whichever is the soonest.
- 2) subject to Terms & Conditions



Compact design - easy installation

The small footprint reduces the space required for installation.

Easy servicing

The design of these packages ensures that the service points are readily accessible. The enclosure side doors are hinged and removable to allow complete access to all service points. The reduced number of moving parts and the innovative design of the separator, further lowers the maintenance costs.

CompAir genuine spare parts

Enjoy complete peace of mind.

Genuine CompAir parts and lubricants ensure that compressed air plant reliability and efficiency is maintained at the highest standards. CompAir spare parts and lubricants are distinguished by:

- Long service life, even under harshest conditions
- Minimum losses contributing to energy savings
- · High reliability improves plant up-time
- Products manufactured with the strictest Quality Assurance Systems





CompAir L-Series - Technical Data

L160° - L290° Fixed Speed

Compressor Model	Nominal Pressure [bar g]	Drive Motor [kW]	FAD ^{1]} [m³/min]	Noise Level ^{2]} [dB(A)]	Weight [kg]	Dimensions L x W x H [mm]
L160°	7.5	160	33.67	75	4542	2907 x 2071 x 2193
	10	160	29.14	75	4542	2907 x 2071 x 2193
L200°	7.5	200	40.09	76	4765	2907 x 2071 x 2193
	10	200	35.64	76	4765	2907 x 2071 x 2193
L250°	7.5	250	42.62	77	4975	2907 x 2071 x 2193
	10	250	38.69	77	4675	2907 x 2071 x 2193
L290°	7.5	250	47.84	78	5000	2907 x 2071 x 2193
	10	250	45.08	78	5000	2907 x 2071 x 2193

L160°RS – L290°RS Regulated Speed

Compressor Model	Nominal Pressure [bar g]	Drive Motor [kW]	FAD ^{1]} [m³/min]	Noise Level at 70% Load ^{2]} [dB(A)]	Weight [kg]	Dimensions L x W x H [mm]
L160°RS	5 - 10	160	9.61 - 32.07	74	4783	2907 x 2071 x 2193
L200°RS	5 - 10	200	9.37 - 39.14	76	5083	2907 x 2071 x 2193
L250°RS	5 - 10	250	9.37 - 42.97	77	5253	2907 x 2071 x 2193
L290°RS	5 - 10	250	9.37 - 47.98	78	5268	2907 x 2071 x 2193

All Models are also available as **WATER COOLED** versions. For technical specifications please refer to the water cooled technical information sheets.

C€



Data measured and stated in accordance with ISO 1217, Edition 4, Annex C and Annex E and the following conditions: Air Intake Pressure 1 bar a, Air Intake Temperature 20°C, Humidity 0 % (Dry).

 $^{^{2]}}$ Measured in free field conditions in accordance with ISO 2151, tolerance \pm 3dB (A).




Global experience truly local service

With over 200 years of engineering excellence, the CompAir brand offers an extensive range of highly reliable, energy efficient compressors and accessories to suit all applications.

An extensive network of dedicated CompAir sales companies and premium partners across all continents provide global expertise with a truly local service, ensuring our advanced technology is backed up with the

ensuring our advanced technology is backed up with the right support.



CompAir compressed air product range

Advanced Compressor Technology Lubricated

- Rotary Screw
- > Fixed and Regulated Speed
- Portable

Oil-Free

- · Water Injected Screw
 - > Fixed and Regulated Speed
- Two Stage Screw
 - > Fixed and Regulated Speed
- Rotary Scroll
- Ultima®

Complete Air Treatment Range

- Filter
- · Refrigerant and Desiccant Dryer
- · Condensate Management
- Heat of Compression Dryer
- Nitrogen Generator

Modern Control Systems

- CompAir DELCOS Controllers
- · SmartAir Master Sequencer
- · iConn Smart Compressor Service

CompAir policy is one of continuous improvement and we therefore reserve the right to alter specifications and prices without prior notice. All products are sold subject to the Company's conditions of sale.

Value Added Services

- Professional Air Audit
- Performance Reporting
- · Leak Detection

Leading Customer Support

Custom Engineered Solutions

PureAir

ULTIMA UTAC

- · Local Service Centres
- Genuine CompAir Parts and Lubricants